




**Part number APF9021
07-08 Ford Mustang
4.0L V6**

- 1- MR Tech Cast aluminum intake (#1022-BB)
- 1- 8" inverted top Amsoil filter (#11035)
- 1- Powder coated heat shield (#3080)
- 1- 2" long 17mm hose (#3129)
- 1- 4" straight hose (#3134)
- 1- 3" x 3 1/4" step hose (#4004)
- 1- Power-band (.362) .048 (#4005)
- 1- Power-band (.412) .056 (#4006)
- 2- Power-bands (.462) .064 (#4007)
- 1- Mini-clamps .110 (#6002)
- 1- m6 flange nut (#6010)
- 2- fender washers (#6045)
- 1- 4" velocity stack (#6056)
- 4- m6 x 12mm socket head (#6058)
- 1- 23" Foam rubber trim (#6073)
- 1- m6 x 20mm socket bolt
- 1- Instruction (5 Pages)

Sold separately:
Hydro-shield (#1038)

All parts and accessories are sold on-line at:
"injenonline.com"

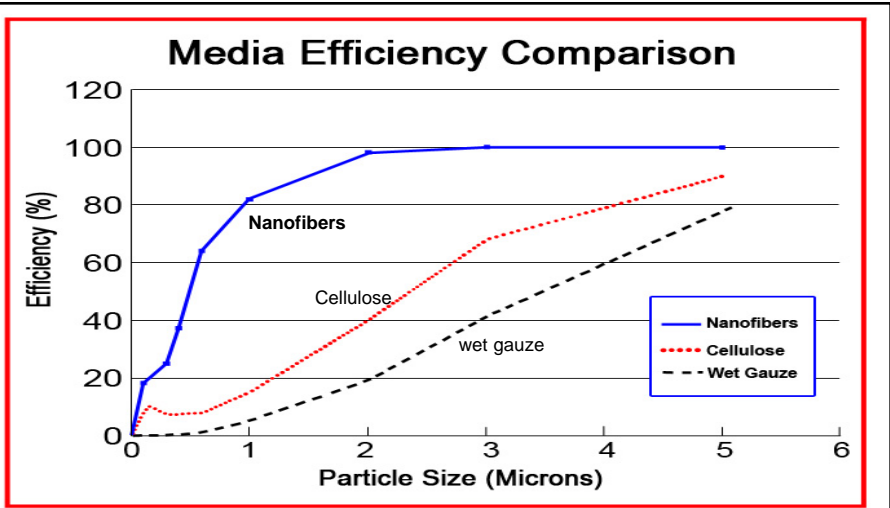

Nanofiber technology: Is an oil free filtration media that has been used exclusively in heavy duty applications, including the US Army's Abrams M1 tanks. Injen/AMSOIL is now making it available to diesel applications and the gas auto/light truck market.

Congratulations! You have just purchased the best engineered and most advanced air intake system, equipped with Ea nanofiber air filter.

Please check the contents of this box immediately.

Report any defective or missing parts to the authorized Injen or AMSOIL dealer you purchased this product from. Before installing any parts of this system, please read the instructions thoroughly. If you have any questions regarding installation, please contact your dealer, Injen Technology or AMSOIL. Installation DOES require some mechanical skills. A qualified mechanic is always recommended.

*Do not attempt to install the intake system while the engine is hot. The installation may require removal of radiator fluid line that may be hot. Injen Technology offers a limited lifetime warranty to the original purchaser against defects in materials and workmanship. Warranty claims must be handled through the dealer from which the item was purchased.

Injen Technology 285 Pioneer Place Pomona, CA 91768 USA

Note: This intake system was tested with an Injen/AMSOIL air filter made from synthetic Nanofiber media which has a 100,000 mile service life or four year warranty, whichever comes first

Note: In off-road, frequently dusty or other severe duty applications, clean and change the Injen/AMSOIL air filter more often as determined by operating conditions.

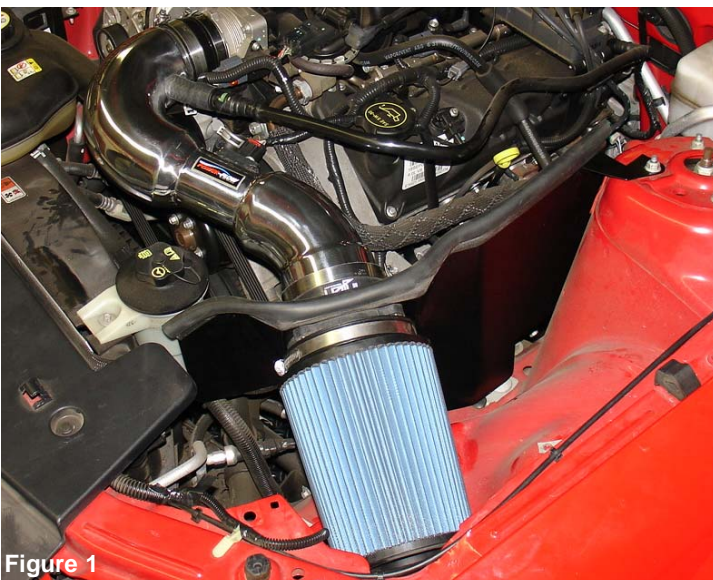


Figure 1



Figure 2



Figure 3
Stock air box cleaner and air intake duct.



Figure 4
Mass air flow sensor harness clip is disconnected.



Figure 5
The clamp on the air intake duct is loosened.



Figure 6
The crank case hard pipe breather line is disconnected.



Figure 7
The bolt holding the air box bracket is loosened and removed. This will allow the air box to be pulled out of the engine compartment.



Figure 8
Once the clamp has been loosened continue to remove the air duct from the throttle body.



Figure 9
Remove the entire air intake duct and air intake cleaner from the engine compartment.

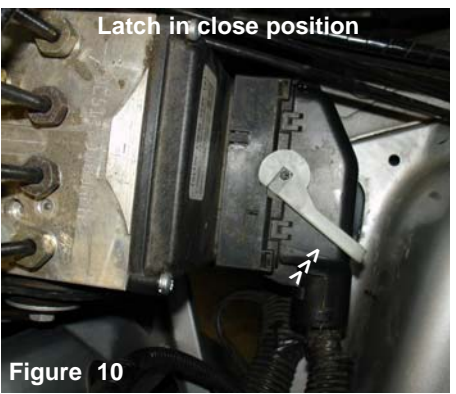


Figure 10
Vehicles equipped with ABS: Locate the ABS solenoid latch, Flip the latch over to the right and pull the harness clip out of the ABS box connector.



Figure 11
The latch is in the open position and the harness clip is removed from the ABS solenoid.



Figure 12
Remove the m6 bolt that fastens the ABS solenoid leg to the car frame.



Figure 13
Remove the m8 bolt on top of the strut tower mount.



Figure 14
The heat shield is now lowered into the engine compartment and the top bracket is aligned to the strut tower mount and the lower bracket is aligned to the ABS solenoid.

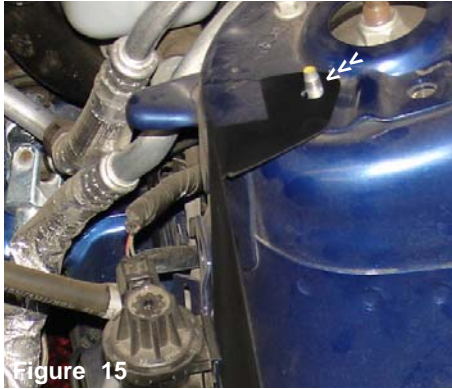


Figure 15
The top heat shield bracket is aligned to the stud on the strut tower mount as shown above.

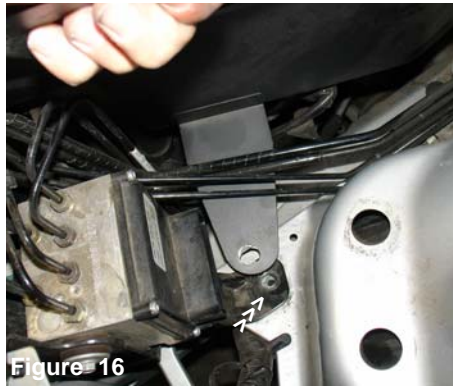


Figure 16
The lower heat shield bracket is aligned with the hole over the ABS bracket.



Figure 17
The heat shield bracket is secured with the stock bolt removed earlier.



Figure 18
The m6 bolt, nut and two washers are used to bolt the bracket to the frame.



Figure 19
The m6 flange nut and washer is fastened from un.



Figure 20
A 10mm wrench or socket is used to tighten the m6 flange nut to the frame underneath.



Figure 21
A 12mm socket is used to tighten the nut over the heat shield.

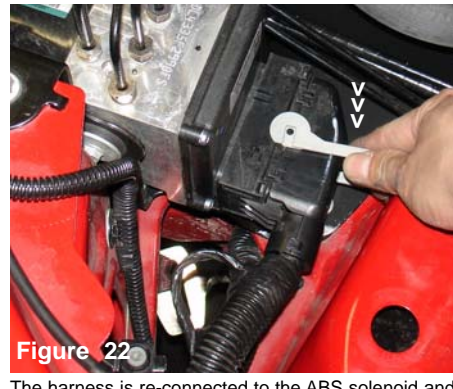


Figure 22
The harness is re-connected to the ABS solenoid and the latch is pulled into the close position.



Figure 23
The composite velocity stack is now pressed into the filter neck, the clamp on the filter neck is tightened.



Figure 24
The assembled filter and velocity stack is now aligned to the four heatshield bolt holes.



Figure 25
The outlet side of the velocity stack is inserted into the heatshield and aligned to the bolt pattern.



Figure 26
The four m6 x 12mm bolts are used to fasten the velocity stack to the heat shield.



Figure 27

Take the vinyl trim and press it along the top edge of the heat shield.



Figure 28

The vinyl trim is firmly pressed on the edge of the heat shield.



Figure 29

Press the 4" straight hose over the velocity stack and use two .462 Power-bands, tighten the Power-band located on the velocity stack end.



Figure 30

Press the step hose with the power clamps over the throttle body. The throttle body should be butted up against the stop built in to the step hose.

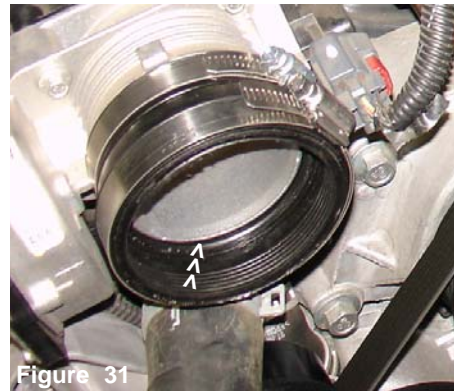


Figure 31

The throttle body lip is butted up against the step hose stop. Once you have installed the step hose, continue to tighten the clamp over the throttle body side.



Figure 32

Remove the stock bolts holding the mass air flow sensor in the sensor housing.



Figure 33

Once you have removed the bolts, continue to pull the mass air flow sensor from the sensor housing.

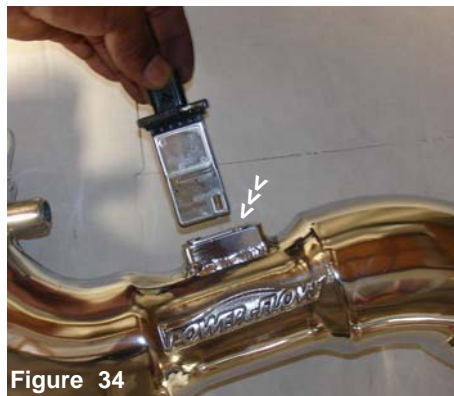


Figure 34

The mass air flow sensor is inserted into the machined sensor adapter located on the calibrated intake.



Figure 35

The stock bolts are used to fasten the mass air flow sensor into the machined sensor adapter.



Figure 36

The cast aluminum intake is lowered into the engine compartment and the filter end is inserted into the 4" straight hose.



Figure 37

The filter end of the intake is inserted into the 4" straight hose located on the velocity stack.



Figure 38

Once the filter end has been aligned with the 4" straight, continue to insert the upper end into the throttle body step hose.



Figure 39

Using pliers, remove the small clamp from the air duct breather port.

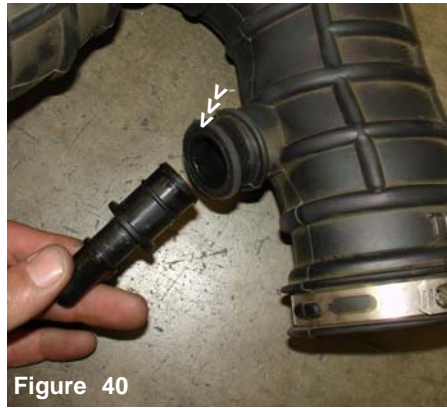


Figure 40

Remove the clamp and slide the plastic vacuum coupler out from the air intake duct.



Figure 41

Press the 2 inch- 17mm vacuum hose over the 3/4" end on the stock vacuum coupler as shown above.



Figure 42

Press the vacuum coupler with the 17mm hose into the crank case hard pipe as shown above.



Figure 43

The 17mm hose is pressed over the intake port. Use the small clamp in this kit to fasten the 17mm hose over the intake port.



Figure 44

The crankcase breather hose is now fully connected and installed.



Figure 45

The electrical harness clip is pressed over the mass air flow sensor, press until you hear the two snap together.



Figure 46

Congratulations! You have just completed the installation of the World's first tuned air intake system. No calibration will be required for the mass air flow sensor, the intake comes pre-tuned.

1. Upon completion of the installation, reconnect the negative battery terminal before you start the engine.
2. Align the entire intake system for the best possible fit. Once the intake has been properly fitted continue to tighten all nuts, bolts and clamps.
3. Periodically, recheck the alignment of the intake system and make sure there is proper clearance around and along the length of the intake. Failure to follow proper maintenance procedures may cause damage to the intake and will void the warranty.
4. Start the engine and listen carefully for any odd noises, rattles and/or air leaks prior to taking it for a test drive. If any problems arise go back and check the vacuum lines, hoses and clamps that maybe causing leaks or rattles and correct the problem.
5. Check the filter for excessive dirt build up. Clean or replace the filter with an original Amsoil filter (can be bought on-line at "injenonline.com"). Congratulations! You have just completed the installation of the best intake system sold on the market. Enjoy the added power and performance of your new intake system.