



\$1.50 CAN.

The First in Synthetics®

Factory Direct Catalog

Synthetic Motor Oils
Synthetic Drivetrain Lubes
Oil & Air Filters • Fuel Additives
Appearance Products



TO ORDER – Call 1-800-956-5695 7 a.m. to 5 p.m. Central Time, M - F

The First in Synthetics®



During Lieutenant Colonel Al Amatuzio's 25 years as an award-winning jet fighter pilot, he gained a solid appreciation for the extraordinary lubricants that protected the engines of the jets he flew. He knew that *only* these lubricants, synthetic lubricants, could stand up to the demanding operating conditions of jet engines and the severe temperature extremes they encounter.

He knew also that the same outstanding performance benefits synthetic lubricants provide for jet engines would prove invaluable to car, truck and other internal combustion engines.

In the mid-1960s, Al Amatuzio began an intense period of research and development. He assembled the industry's most knowledgeable chemists and directed the formulation of the first synthetic motor oil in the world to meet American Petroleum Institute service requirements.



The introduction of AMSOIL synthetic motor oil in 1972 set all-new standards for motor oil quality. AMSOIL synthetic motor oil outperformed conventional petroleum motor oils on all counts. It was clear from the start that this innovative product would play a major role in engine performance and engine life.

Today, virtually every other motor oil manufacturer has recognized the superiority of synthetic lubricants and has followed the AMSOIL lead with introductions of synthetic motor oils of their own. They spend millions of dollars advertising their "new" and "revolutionary" products. No one, however, can match AMSOIL experience and technological know-how. And no one delivers products like AMSOIL. Accept no substitutes — AMSOIL is "The First in Synthetics."®

Know the Facts - **AMSOIL Saves You Money!**

AMSOIL extended drain intervals mean fewer oil changes, long term savings and convenience

EXAMPLE:

Conventional motor oil companies recommend 5,000-km drain intervals

Conventional 10W-30 Motor Oil

* (40 946-ml needed for
40,000 km)

@ 2.40/946-ml x 40 = \$96.00

8 Standard Oil Filters

@ 8.00 per filter x 8 = \$64.00

TOTAL **\$160.00**

AMSOIL recommends 40,000-km/1-year drain intervals

AMSOIL 10W-30 Synthetic Motor Oil

* (6 946-ml needed for
40,000 km)

@ 9.20/946-ml x 6 = \$55.20

2 AMSOIL Super Duty
Oil Filters

@ 16.45 per filter x 2 = \$32.90

TOTAL **\$88.10**

* Comparison based on 40,000 km driven per year and 5-litre oil capacity, with one 946-ml bottle top-off oil for filter change.

You save **\$71.90 per year** using AMSOIL premium quality synthetic motor oil and oil filters.

Even if you drive only 19,000 kilometers per year, the cost for AMSOIL is the same as you pay for petroleum oil now! But you still get better protection, lower engine temperatures, easier cold-weather starts and less engine wear. All of these benefits add up to an engine that will last longer and need fewer repairs. Change your oil and filter today and in six months change the filter again. That's it! What could be more convenient and good for your vehicle, too?

Products the Pros Use

AMSOIL Motocross/Supercross




Mike LaRocco

The AMSOIL motocross/supercross team will be racing in pursuit of an AMA motocross title this summer. Look for Team AMSOIL all season on ESPN2. AMSOIL is an official licensed product of the AMA Outdoor Nationals.

"I couldn't be happier with the AMSOIL products. I feel like I have an edge over the competition when it comes to performance and durability, and that's a great feeling when the going gets tough. Our race program uses most everything in the AMSOIL line."

Mike LaRocco

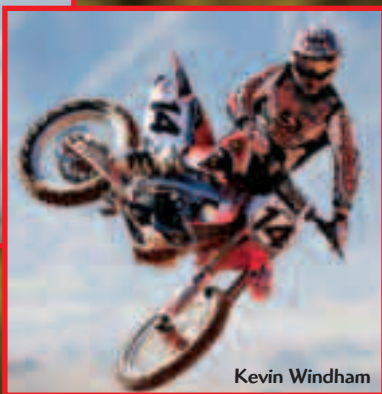

Kevin Windham

2005 AMA Motocross Schedule

Sacramento, CA

Hangtown Classic

May 22

Mt. Morris, PA

High Point Raceway

May 29

Southwick, MA

Motocross 338

June 12

Budds Creek, MD

Budds Creek Motocross Park

June 19

Buchanan, MI

Red Bud Track-N-Trail

July 3

New Berlin, NY

Unadilla Valley Sports Center

July 17

Lakewood, CO

Thunder Valley Motocross Park

July 24

Washougal, WA

Washougal Motocross Park

July 31

Millville, MN

Spring Creek Motocross Park

August 14

Binghamton, NY

Broome-Tioga Sports Center

August 21

Delmont, PA

Steel City Raceway

September 4

San Bernardino, CA

Glen Helen Raceway Park

September 11

Dates and locations subject to change.

AMSOIL Champ Boat Series



Team AMSOIL powerboat racing star **Terry Rinker** is back in action this summer on the exciting Champ Boat Series racing circuit. Watch all the formula one racing action on the Outdoor Channel as Rinker pursues another Champ Boat Series championship. AMSOIL is the official oil of the Champ Boat Series.

AMSOIL Snocross

Team AMSOIL snocross stars **D.J. Eckstrom** and **Carl Schubitzke** combined for an outstanding season on the WSA snocross racing circuit. Watch for Team AMSOIL next season in its chase for a title.

"AMSOIL products have taken away a huge deterrent in the harsh environment of racing. The AMSOIL products we use deliver the consistency and performance that this sport demands."

*Team AMSOIL owner
Steve Scheuring*



Official Two-Cycle Oil

See www.amsoil.com for the latest racing schedules.

TO ORDER – Call 1-800-956-5695 7 a.m. to 5 p.m. Central Time, M - F




Series 2000 Synthetic 20W-50 Racing Oil

The number one choice for racers of all types of vehicles. Special synthetic base stocks and advanced additive package provide over twice the wear protection of other motor oils. Reduces friction for quicker engine response and increased horsepower.

SERIES 2000 SAE 20W-50 SYNTHETIC RACING OIL API Service SL/CF, SJ, SH . . .

Stock#	Pkg./Size	Wt.Lbs.	Cost
TRO-QTC	(1) 946-ml Bottle	2.2	12.90
TRO-01C	(12) 946-ml Bottles	26.0	153.60

The smaller wear scar, the better the protection!

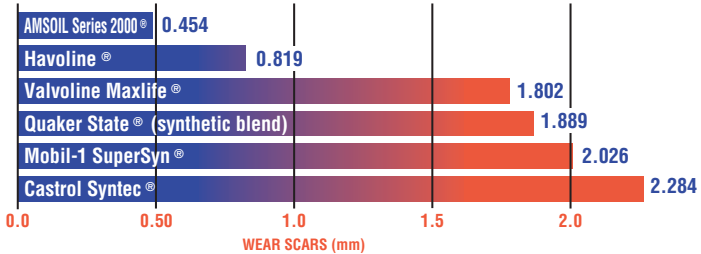

Four-Ball Wear Test (ASTM D4172), 60 kg pressure @ 150°C, 1800 rpm, for 1 hour duration
As tested by an independent lab in 2003.



SAE 60 Synthetic Super Heavy Weight Racing Oil

High viscosity oil designed for high horsepower racing engines. Resists thinning effects of fuel dilution and provides unsurpassed wear protection, friction reduction and more power. Highly resistant to thermal degradation and oxidation.

SAE 60 SYNTHETIC SUPER HEAVY WEIGHT RACING OIL API SL/CF, JASO MB

Stock#	Pkg./Size	Wt.Lbs.	Cost
AHR-QT	(1) 946-ml Bottle	2	12.45
AHR-01	(12) 946-ml Bottles	25	148.20

Series 2000 Synthetic 0W-30 Motor Oil

The top performing AMSOIL Motor Oil for passenger cars. Race-proven technology provides unsurpassed fuel efficiency and better wear protection than other conventional and synthetic motor oils. Recommended for use in all vehicles requiring the use of 5W-30 or 10W-30 motor oils.


**Advanced
Fuel Efficient
Formula**



SERIES 2000 SAE 0W-30 SYNTHETIC MOTOR OIL API Service SL/CF, SJ, SH . . .

Stock#	Pkg/Size	Wt. Lbs.	Cost
TSO-QTC	(1) 946-ml Bottle	2.2	12.90
TSO-O1C	(12) 946-ml Bottles	26.0	153.60

The smaller wear scar, the better the protection!

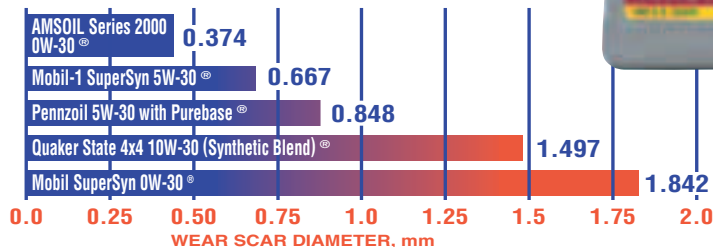

Four-Ball Wear Test (ASTM D4172), 40 kg, pressure @ 150°C, 1800 rpm, for 1 hour duration
As tested by an independent lab in 2003.

Series 3000 Synthetic 5W-30 Heavy Duty Diesel Oil

Fuel efficient formula for both gasoline and diesel fleets. Contains the beefiest additive package of all AMSOIL Motor Oils. Delivers better wear protection than other popular diesel oils and effectively reduces fuel consumption. Series 3000 resists oil breakdown from heat, blow-by chemicals and acids up to 10 times longer than conventional oils.

**TEST
PROVEN!
Reduces Fuel
Consumption**



SERIES 3000 SAE 5W-30 SYNTHETIC HEAVY DUTY DIESEL OIL API CI-4+/CF/CF-2/SL • GLOBAL DHD-1 ACEA A3/B3, E3, E5 • JASO DH-1 • MACK DETROIT DIESEL • CATERPILLAR • CUMMINS VOLVO • DAIMLER-BENZ


Stock#	Pkg/Size	Wt. Lbs.	Cost
HDD-QTC	(1) 946-ml Bottle	2.2	12.90
HDD-O1C	(12) 946-ml Bottles	26.0	153.60
HDD-1G	(1) 3.78-litre Bottle	8.5	50.95
HDD-04	(4) 3.78-litre Bottles	34.0	202.20
HDD-TP	(1) 9.45-litre Bottle	19.6	109.50
HDD-05	(2) 9.45-litre Bottles	39.2	217.00

**Our Top
Selling Synthetic
Motor Oil**



Synthetic Motor Oil

Dramatically outperforms conventional petroleum motor oils. Reduces friction, heat and wear for maximum power, performance and fuel efficiency. Resists high-temperature burn-off, chemical breakdown and sludging—keeps engines cleaner. Outstanding low-temperature fluidity for fast, dependable winter starts and immediate start-up protection. Exceeds the most demanding world-wide performance standards and meets warranty requirements for all domestic and imported passenger car engines, both turbocharged and nonturbocharged. Up to 40,000-km or 1-year drain intervals.

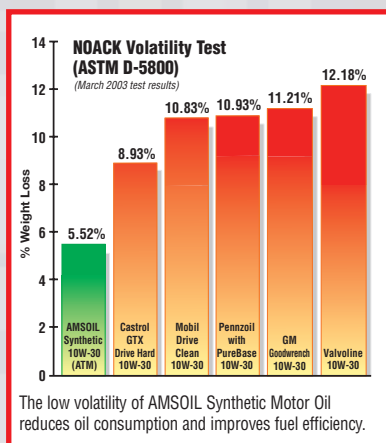

NOTE: Most quick lube service centers will install these products upon request or install them yourself.

SAE 5W-30 SYNTHETIC MOTOR OIL API Service SL/CF, SJ, SH . . .

Stock#	Pkg./Size	Wt. Lbs.	Cost
ASL-QTC	(1) 946-ml Bottle	2.1	9.20
ASL-01C	(12) 946-ml Bottles	25.0	109.20
ASL-1GC	(1) 3.78-litre Bottle	8.0	34.50
ASL-04C	(4) 3.78-litre Bottles	32.0	136.40

SAE 10W-30 SYNTHETIC MOTOR OIL API Service SL/CF, SJ, SH . . .

Stock#	Pkg./Size	Wt. Lbs.	Cost
ATM-QTC	(1) 946-ml Bottle	2.1	9.20
ATM-01C	(12) 946-ml Bottles	25.0	109.20
ATM-1G	(1) 3.78-litre Bottle	8.0	34.50
ATM-04	(4) 3.78-litre Bottles	32.0	136.40

Synthetic High Performance Motor Oil

Ideal for motorhomes and high-performance applications. Features high-stress formulations with beefier antiwear and detergent/dispersant packages. Outperforms leading synthetic oils.

SAE 10W-40 SYNTHETIC HIGH PERFORMANCE MOTOR OIL

API Service SL/CF, SJ, SH . . .

Stock#	Pkg./Size	Wt.Lbs.	Cost
AMO-QTC	(1) 946-ml Bottle	2.1	9.20
AMO-01C	(12) 946-ml Bottles	25.0	109.20
AMO-1G	(1) 3.78-litre Bottle	8.0	34.50
AMO-04	(4) 3.78-litre Bottles	32.0	136.40

SAE 20W-50 SYNTHETIC HIGH PERFORMANCE MOTOR OIL

API Service SL/CF, SJ, SH . . .

Stock#	Pkg./Size	Wt.Lbs.	Cost
ARO-QTC	(1) 946-ml Bottle	2.2	10.05
ARO-01C	(12) 946-ml Bottles	26.0	119.40
ARO-1G	(1) 3.78-litre Bottle	8.0	38.15
ARO-04	(4) 3.78-litre Bottles	33.0	151.00

Synthetic 5W-40 European Motor Oil

Specially formulated for the lubrication needs of European gasoline and diesel cars and light trucks. Blended with advanced AMSOIL synthetic base stocks, premium additives and a broad 5W-40 viscosity rating, allowing motorists to take advantage of the maximum extended drain intervals recommended by European automakers while providing second-to-none protection and performance.

AMSOIL Synthetic 5W-40 European Motor Oil is recommended for applications requiring the following performance specifications:

API CI-4+, SL/CF • ACEA A3/B3, E3, E5 • BMW LL-01/98

Daimler Chrysler MB 229.1, 229.3, 229.5

Opel Long Life GM LL-A-025

Opel Long Life Diesel GM LL-B-025 • Porsche

Volvo • Saab • VW 501.01, 502.00, 505.00

SYNTHETIC 5W-40 EUROPEAN MOTOR OIL

Stock #	Pkg./Size	Wt. Lbs.	Cost
AFL-QT	(1) 946-ml Bottle	2.1	9.50
AFL-01	(12) 946-ml Bottles	24.8	112.80
AFL-30	113.4-litre Drum	244.1	906.00
AFL-55	207.9-litre Drum	437.9	1537.00



Synthetic XL Motor Oil

AMSOIL XL Synthetic Motor Oils provide peace-of-mind. The oil drain interval recommendations for many of today's vehicles extend well beyond the traditional 5,000-km interval, some up to 20,000 kilometers with electronic oil monitoring systems. Unlike petroleum oils that have 5,000-km maximum recommendations, AMSOIL XL Oils provide 12,000-km/six-month drain intervals or longer where stated by vehicle manufacturers or indicated by oil life monitoring systems. When using AMSOIL XL Synthetic Motor Oils, protection and performance are not sacrificed with longer drain intervals.

SYNTHETIC XL MOTOR OIL

5W-20 MOTOR OIL

API SM/CF, SL, SJ . . . , ILSAC GF-4, 3 . . .

Stock#	Pkg./Size	Wt.Lbs.	Cost
XLM-QTC	(1) 946-ml Bottle	2.0	8.50
XLM-01C	(12) 946-ml Bottles	24.0	100.80

5W-30 MOTOR OIL

API SM/CF, SL, SJ . . . , ILSAC GF-4, 3 . . .

Stock#	Pkg./Size	Wt.Lbs.	Cost
XLF-QTC	(1) 946-ml Bottle	2.0	8.50
XLF-01C	(12) 946-ml Bottles	24.0	100.80

10W-30 MOTOR OIL

API SM/CF, SL, SJ . . . , ILSAC GF-4, 3 . . .

Stock#	Pkg./Size	Wt.Lbs.	Cost
XLT-QTC	(1) 946-ml Bottle	2.0	8.50
XLT-01C	(12) 946-ml Bottles	24.0	100.80

10W-40 MOTOR OIL

API SM/CF, SL, SJ . . .

Stock#	Pkg./Size	Wt.Lbs.	Cost
XLO-QT	(1) 946-ml Bottle	2.0	8.50
XLO-01	(12) 946-ml Bottles	24.0	100.80

- AMSOIL synthetic motor oils are fully compatible with conventional motor oil. For best results, however, use AMSOIL Engine Flush, then install AMSOIL synthetic motor oil (See page 32).
- For maximum engine protection, use an AMSOIL Oil Filter (See page 28) and an AMSOIL Air Filter (See page 29).

**Take Advantage
of Convenience and
Savings with a
12,000-km/Six-Month
Oil Change**

Synthetic 15W-40 Heavy Duty Diesel Oils

Engineered for all types of diesel engines with an emphasis on modern, low emission heavy-duty diesel engines. High 12 TBN controls acids from combustion blow-by and EGR. High levels of detergency and dispersancy additives control soot thickening, oxidation and wear. Protects against bore polishing, deposit formation and ring sticking. Provides clean engine performance. Extended drain capabilities reduce downtime and motor oil expenses.

SAE 15W-40 SYNTHETIC HEAVY DUTY DIESEL AND MARINE MOTOR OIL

API CI-4+/CF/CF-2/SL • GLOBAL DHD-1 • ACEA A3/B3, E3, E5
JASO DH-1 • MACK • DETROIT DIESEL • CATERPILLAR
CUMMINS • VOLVO • DAIMLER-BENZ

Stock#	Pkg./Size	Wt. Lbs.	Cost
AME-QTC	(1) 946-ml Bottle	2.1	8.05
AME-01C	(12) 946-ml Bottles	25.0	95.40
AME-1GC	(1) 3.78-litre Bottle	8.0	31.65
AME-04C	(4) 3.78-litre Bottles	33.0	125.00
AME-TP	(1) 9.45-litre Bottle	20.0	75.65
AME-05	(2) 9.45-litre Bottles	40.0	149.30

SAE 15W-40 SYNTHETIC BLEND GASOLINE & DIESEL OIL

API CI-4+/CF/CF-2/SL • GLOBAL DHD-1 • ACEA A3/B3, E3, E5
JASO DH-1 • MACK • DETROIT DIESEL • CATERPILLAR
CUMMINS • VOLVO • DAIMLER-BENZ

Stock#	Pkg./Size	Wt. Lbs.	Cost
PCO-QT	(1) 946-ml Bottle	2.1	6.45
PCO-01	(12) 946-ml Bottles	25.0	76.20
PCO-1G	(1) 3.78-litre Bottle	8.0	24.15
PCO-04	(4) 3.78-litre Bottles	33.0	95.00


Synthetic 10W-30/SAE 30 Heavy Duty Diesel Oil

Exceeds both 10W-30 multi-grade and SAE 30 straight-grade viscosity requirements. Provides outstanding performance in older and modern diesel engines as well as gasoline engines.

SYNTHETIC 10W-30/SAE 30 HEAVY DUTY DIESEL OIL

API CI-4+/CF/CF-2/SL • GLOBAL DHD-1 • ACEA A3/B3, E3, E5
JASO DH-1 • MACK • DETROIT DIESEL • CATERPILLAR • CUMMINS
VOLVO • DAIMLER-BENZ

Stock#	Pkg./Size	Wt. Lbs.	Cost
ACD-1G	(1) 3.78-litre Bottle	8.0	32.05
ACD-04	(4) 3.78-litre Bottles	33.0	126.60

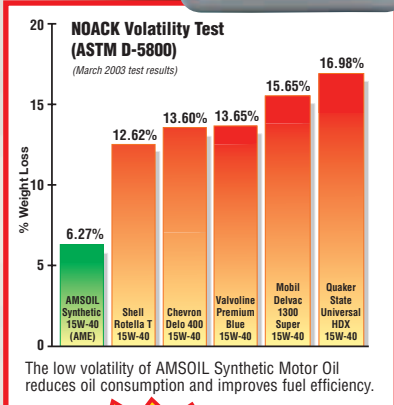

See page 7 for our newest Series 3000 5W-30 Heavy Duty Diesel Oil





HP Injector Synthetic 2-Cycle Oil

Precise synthetic formulation exceeds the lubrication demands of modern two-cycle engines. Premium synthetic base oils and MAX-DOSE additive system provides superior performance in direct fuel injected (DFI), electronic fuel injected (EFI) and carbureted outboard motors, as well as other recreational two-cycle equipment.

HP INJECTOR SYNTHETIC 2-CYCLE OIL TC-W3 / API TC

Stock #	Pkg./Size	Wt. Lbs.	Cost
HPI-QTC	(1) 946-ml Bottle	2.0	8.20
HPI-01C	(12) 946-ml Bottles	24.5	97.20
HPI-1GC	(1) 3.78-litre Bottle	7.9	31.75
HPI-04C	(4) 3.78-litre Bottles	31.7	125.40

DOMINATOR Synthetic 2-Cycle Racing Oil

Robust formulation specially engineered for unsurpassed protection in high performance two-cycle motors, both on and off the track. Heavier synthetic base oils provide more *lubricity* for "on the edge" operation. Reduces friction and protects pistons and bearings subjected to the rigors of racing.

DOMINATOR SYNTHETIC 2-CYCLE RACING OIL API TC / JASO FC

Stock #	Pkg./Size	Wt. Lbs.	Cost
TDR-QTC	(1) 946-ml Bottle	2.1	12.50
TDR-01C	(12) 946-ml Bottles	25.1	148.80
TDR-1G	(1) 3.78-litre Bottle	8.1	46.80
TDR-04	(4) 3.78-litre Bottles	32.4	185.60

Interceptor Synthetic 2-Cycle Oil

Engineered specially for power sports applications and those engines equipped with exhaust power valves. Contains the finest synthetic base oils and additives available for exceptional cleanliness properties. Controls exhaust valve sticking and provides outstanding overall lubrication properties.

INTERCEPTOR SYNTHETIC 2-CYCLE OIL API TC / JASO FC

Stock #	Pkg./Size	Wt. Lbs.	Cost
AIT-QTC	(1) 946-ml Bottle	2.1	10.30
AIT-01C	(12) 946-ml Bottles	25.0	122.40
AIT-1GC	(1) 3.78-litre Bottle	8.0	39.90
AIT-04C	(4) 3.78-litre Bottles	33.0	158.00



Maximum performance
in two-cycle snowmobiles,
ATVs and personal
watercraft



Saber Synthetic 100:1 Pre-Mix 2-Cycle Oils

Specifically designed for lean mix ratios in pre-mix applications. Saber Professional contains high temperature detergents for small power equipment. Saber Outboard contains lower temperature dispersants for water-cooled outboard motors.



SABER PROFESSIONAL SYNTHETIC 100:1 PRE-MIX 2-CYCLE OIL

ISO-L-EGD / API TC / JASO FC

Stock #	Pkg./Size	Wt. Lbs.	Cost
ATP-BC	(1) 236-ml Bottle	0.7	4.50
ATP-08	(12) 236-ml Bottles	8.6	52.80
ATP-PK	(1) 44-ml Pillow Pack	0.2	1.60
ATP-48	(48) 44-ml Pillow Packs	7.2	72.00
ATP-QTC	(1) 946-ml Bottle	2.1	11.45
ATP-01C	(12) 946-ml Bottles	25.4	136.20
ATP-BA	(1) 103-ml Bottle	0.4	2.40
ATP-35	(12) 103-ml Bottles	4.5	27.60

SABER OUTBOARD SYNTHETIC 100:1 PRE-MIX 2-CYCLE OIL

TC-W3 / API TC

Stock #	Pkg./Size	Wt. Lbs.	Cost
ATO-BC	(1) 236-ml Bottle	0.7	4.85
ATO-08	(12) 236-ml Bottles	8.7	57.00
ATO-QT	(1) 946-ml Bottle	2.2	11.55
ATO-01	(12) 946-ml Bottles	25.8	137.40

AMSOIL 2-Cycle Oil Recommendations

AMSOIL 2-Cycle Oil	Outboard*	Snowmobile*, Motorcycle* & ATV*	Personal Watercraft* & Jet Boat*	Chain Saw, Chop Saw & Pump	Weed Eater, Blower & Lawn Mower	Moped, Scooter & Go-Cart
HP Injector (HPI) TC-W3, API TC (Injection or 50:1 Pre-Mix)	Excellent	Very Good	Very Good	Not Recommended	Not Recommended	Not Recommended
INTERCEPTOR (AIT) API TC, JASO FC	Not Recommended	Excellent	Excellent	Good	Good	Good
DOMINATOR (TDR) API TC, JASO FC	Racing (1)	Racing (2)	Racing (2)	Very Good	Very Good	Very Good
Saber Professional 100:1 Pre-Mix (ATP) ISO-L-EGD, JASO FC, API TC	Not Recommended	Very Good Pre-Mix Only	Very Good Pre-Mix Only	Excellent	Excellent	Excellent
Saber Outboard 100:1 Pre-Mix (ATO) TC-W3, API TC	Excellent Pre-Mix Only	Very Good Pre-Mix Only	Very Good Pre-Mix Only	Not Recommended	Not Recommended	Not Recommended

Equipment manufacturers and motor builders have redesigned two-cycle motors to reduce emissions and increase fuel economy. These changes have increased operating temperatures, reduced oil consumption and incorporated direct fuel injection and exhaust power valves. AMSOIL 2-Cycle Oils are designed to maximize performance in all types of engine designs and are optimized for select applications.

Even though AMSOIL 2-Cycle Oils have been optimized for specific applications, they are multi-functional and recommended for use in many areas. The chart rates each oil's performance abilities per application as follows:

Excellent: The primary recommendation for the oil. The oil is specifically designed for the operating conditions of the motors in these markets. There is only one "Excellent" recommendation per category.

Very Good: A main recommendation for the oil. Identifies an oil that is very good for the operating conditions of these motors.

Good: A secondary recommendation for an oil. The oil was not specifically designed for these applications. However, the chemistry in the oil is suited to the operating conditions of these motors.

Not Recommended: Identifies applications where the product was not intended for use.

Racing: (1) Not recommended for long-term use in outboard motors as a TC-W3 type oil, although excellent as a race oil for short term use where motors are periodically inspected.

(2) Excellent for racing or modified motors. Very good for recreational use.

*Recommended for all direct fuel injected (DFI), electronic fuel injected (EFI) and carbureted motors. Outboard motors include Mercury® Optimax,™ Johnson® & Evinrude® FICHT® & E-TEC,™ Yamaha® HPDI, Nissan® & Tohatsu® TLDI!®


NEW!

Synthetic Motorcycle Oils

SAE 20W-50 SYNTHETIC MOTORCYCLE OIL
API SERVICE SG, SL/CF • JASO MA

Recommended for Harley-Davidson, Buell and other motorcycle engines. Superior synthetic formulation provides long service life and maximum protection against engine wear. Superior shear stability provides unsurpassed protection for high performance engines, transmissions and primary chaincases. No friction modifiers. Wet clutch compatible.

Stock#	Pkg./Size	Wt. Lbs.	Cost
MCV-QT	(1) 946-ml Bottle	2.1	11.90
MCV-01	(12) 946-ml Bottles	24.7	141.60

SAE 10W-40 SYNTHETIC MOTORCYCLE OIL
API SERVICE SG, SL/CF • JASO MA

Recommended for Honda, Yamaha, Kawasaki, BMW and other motorcycle engines. Superior synthetic formulation provides long service life and maximum protection against engine wear. Superior shear stability provides unsurpassed protection for high performance engines and transmissions. No friction modifiers. Wet clutch compatible.

Stock#	Pkg./Size	Wt. Lbs.	Cost
MCF-QT	(1) 946-ml Bottle	2.1	11.50
MCF-01	(12) 946-ml Bottles	24.6	136.80

Formula 4-Stroke® Marine Synthetic Motor Oils

Formulated specifically for use in 4-stroke gasoline-fueled engines used in marine applications. Offer unsurpassed wear protection, viscosity stability, low volatility and excellent low temperature fluidity. Certified to meet NMMA FC-W performance specifications. Meet "Warranty Certified" status of engine manufacturers. Recommended for use in 4-stroke outboard motors including Honda, Yamaha, Mercury, Suzuki, Johnson-Evinrude (BRP), Nissan and Tohatsu. Excellent for use in marine stern drives (inboard/outboard) including Mercury (MerCruiser), OMC and Volvo-Penta. Also for use with marine inboard power plants including Crusader, Marine Power, GM, Ford and Chrysler. Recommended for use with personal water craft (PWC) including Sea Doo (BRP), Honda, Yamaha and Polaris.

10W-30 FORMULA 4-STROKE®
MARINE SYNTHETIC MOTOR OIL

API SL • NMMA FC-W (Registration #FB-30011B)

Stock #	Pkg./Size	Wt. Lbs.	Cost
WCT-QT	(1) 946-ml Bottle	2.0	9.35
WCT-01	(12) 946-ml Bottles	24.5	111.00

10W-40 FORMULA 4-STROKE®
MARINE SYNTHETIC MOTOR OIL

API SL • NMMA FC-W (Registration #FB-30010B)

Stock #	Pkg./Size	Wt. Lbs.	Cost
WCF-QT	(1) 946-ml Bottle	2.0	10.00
WCF-01	(12) 946-ml Bottles	24.6	118.80

Synthetic 4-Stroke™ Oil

Specially formulated to provide serious protection and performance in recreational four-stroke motors, including ATV's and snowmobiles. Broad 0W-40 viscosity rating provides superior protection in both hot and cold temperature extremes.

AMSOIL FORMULA 4-STROKE™ SYNTHETIC MOTOR OIL
SAE 0W-40 • API SERVICE SG, SH, SJ, SL/CF • JASO MA

Stock#	Pkg./Size	Wt.Lbs.	Cost
AFF-QTC	(1) 946-ml Bottle	2.0	9.70
AFF-O1C	(12) 946-ml Bottles	24.0	115.20



Synthetic 80W-90 Gear Lube

High quality replacement for applications specifying SAE 80W-90 conventional gear lube. Synthetic construction provides improved cold flow properties, high viscosity index, heat resistance and excellent wear protection.

SAE 80W-90 SYNTHETIC GEAR LUBE
API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J
• SHAES 234 (Eaton PS-037)

Stock#	Pkg./Size	Wt.Lbs.	Cost
AGL-QT	(1) 946-ml Bottle	2.1	10.55
AGL-O1	(12) 946-ml Bottles	25.2	125.40
AGL-1G	(1) 3.78-litre Bottle	8.1	40.45
AGL-O4	(4) 3.78-litre Bottles	32.4	160.20
AGL-O5	(1) 18.9-litre Pail	39.8	194.40



Universal Synthetic Marine Gear Lube

Provides true marine gear performance, resists foam and retains extreme pressure qualities even when subjected to 10 percent water contamination. For use in outboard lower units, sterndrives, V-drives, bow and tunnel thrusters and marine transmissions requiring a SAE 75W-90 or 80W-90 meeting either GL-4 or GL-5 performance standards.

SAE 75W/80W-90 UNIVERSAL SYNTHETIC MARINE GEAR LUBE
• GL-5, GL-4

Stock#	Pkg./Size	Wt.Lbs.	Cost
AGM-TB	(1) 236-ml Tube	.8	7.60
AGM-O6	(6) 236-ml Tubes	5.0	45.00
AGM-QT	(1) 946-ml Bottle	2.1	9.55
AGM-O1	(12) 946-ml Bottles	24.8	113.40



SEVERE GEAR™ Synthetic EP Gear Lubes

Specifically engineered for high demand applications, including trailer towing, heavy hauling, 4x4 off road driving, commercial use and racing. Superior lube "film strength" combined with extra additives protects gears and bearings from scoring and wear. Resist high heat and possess excellent cold flow properties. **Outperforms all conventional gear oils.** Recommended for all types of vehicles such as turbo diesel pick-ups, SUVs, autos, trucks, heavy equipment and motor homes. Compatible with most limited-slip differentials.




SAE 75W-90 SEVERE GEAR™ SYNTHETIC GEAR LUBE API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • SHAES 234 (Eaton PS-037)

Stock#	Pkg./Size	Wt.Lbs.	Cost
SVG-QTC	(1) 946-ml Bottle	2.0	13.50
SVG-01C	(12) 946-ml Bottles	24.5	160.80
SVG-05	(1) 18.9-litre Pail	38.8	247.40

SAE 75W-140 SEVERE GEAR™ SYNTHETIC GEAR LUBE API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • SHAES 234 (Eaton PS-037)

Stock#	Pkg./Size	Wt.Lbs.	Cost
SVO-QTC	(1) 946-ml Bottle	2.1	17.40
SVO-01C	(12) 946-ml Bottles	24.7	207.60
SVO-05	(1) 18.9-litre Pail	39.2	313.90

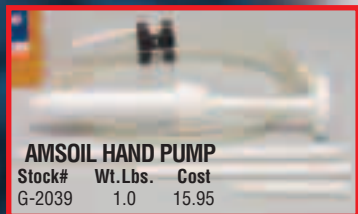

AMSOIL HAND PUMP

Stock#	Wt.Lbs.	Cost
G-2039	1.0	15.95

Long Life Synthetic Gear Lubes


Specifically engineered for extended drain intervals up to 804,500 km as set by equipment manufacturers for over-the-road trucks and heavy equipment. Prevents wear and improves equipment life. Excellent "All Season" summer and winter performance. Outperforms all conventional gear oils. Also excellent for passenger cars and trucks. Compatible with most limited-slip differentials.

SAE 75W-90 LONG LIFE SYNTHETIC GEAR LUBE API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J+ • SHAES 256 (Eaton PS-163)

Stock#	Pkg./Size	Wt.Lbs.	Cost
FGR-QTC	(1) 946-ml Bottle	2.1	11.30
FGR-01C	(12) 946-ml Bottles	25.0	134.40
FGR-1G	(1) 3.78-litre Bottle	8.1	43.40
FGR-04	(4) 3.78-litre Bottles	32.3	172.00
FGR-05	(1) 18.9-litre Pail	39.7	210.40

SAE 80W-140 LONG LIFE SYNTHETIC GEAR LUBE API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J+ • SHAES 256 (Eaton PS-163)

Stock#	Pkg./Size	Wt.Lbs.	Cost
FGO-05	(1) 18.9-litre Pail	40.0	213.20
FGO-16	60.5-litre Keg	135.0	621.00
FGO-30	113-litre Drum	249.0	1034.00
FGO-55	208-litre Drum	446.0	1738.00

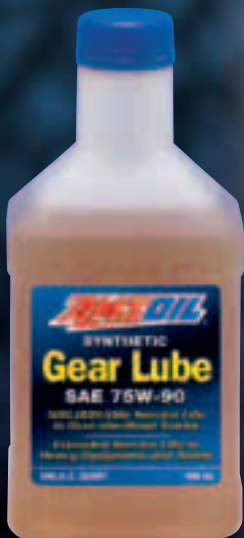

Slip-Lock Differential Additive

Eliminates gear-housing chatter in cars, trucks and SUVs equipped with limited-slip, positraction and locking differentials. Reduces banging and clunking associated with automatic locking differentials. Formulated for use with both synthetic and petroleum gear lubricants and safely replaces manufacturer-recommended friction modifiers. One bottle treats differential capacities of two to four quarts.

Stock #	Pkg./Size	Wt. Lbs.	Cost
ADA-BA	(1) 118-ml Bottle	.3	9.50
ADA-12	(12) 118-ml Bottles	3.9	112.80



Shock Therapy Suspension Fluid

Formulated for maximum stability and performance in high-performance applications. Effectively controls friction and heat and significantly reduces wear and scuffing. Viscosity remains constant and foam and aeration are kept to a minimum, limiting shock fade and inconsistent dampening. Offers superior performance in temperature extremes.

SHOCK THERAPY SUSPENSION FLUID

Stock#	Pkg./Size	Wt. Lbs.	Cost
STL-QT (lightweight #5)	(1) 946-ml Bottle	2.0	12.75
STL-01 (lightweight #5)	(12) 946-ml Bottles	24.0	151.80
STM-QT (medium #10)	(1) 946-ml Bottle	2.0	12.00
STM-01 (medium #10)	(12) 946-ml Bottles	24.0	142.80

AMSOIL STL #5 is recommended for applications that demand quick rebounds under extreme temperatures.

AMSOIL STM #10 is recommended for applications that require more dampening and slower rebounds.





Super Shift Racing Transmission Fluid

Specially formulated for high horsepower and torque conditions. Provides quick, solid shifts. Automatic transmissions do not slip, helping racers improve on elapsed times. Delivers unmatched friction reduction and reduced wear so clutch plates and transmissions last longer. Provides maximum torque transfer and brake power while resisting oxidation and thermal breakdown.

SUPER SHIFT RACING TRANSMISSION FLUID SAE 10W

Stock#	Pkg./Size	Wt. Lbs.	Cost
ART-QT	(1) 946-ml Bottle	2.0	11.30
ART-01	(12) 946-ml Bottles	24.0	134.40

Synthetic Universal Automatic Transmission Fluid

Exceeds the performance requirements for domestic and foreign automatic transmission fluids. Offers smooth shifting and long transmission life. Provides automatic transmissions, power steering units and hydraulic equipment with excellent lubricating protection and better performance over a wider temperature range. Resists oxidation and thermal breakdown. Provides low temperature protection. Formulated with excellent wear protection to last for extended drain intervals.

AMSOIL ATF is recommended for applications requiring the following performance specifications:

- GM DEXRON® II & III • Ford MERCON®, MERCON® V • Chrysler ATF+ thru ATF+4® • Honda Z1 • Toyota Type T & T-IV • Mitsubishi/Hyundai Diamond SP II & III • Allison C-3, C-4 • Caterpillar TO-2 • Voith G-1363 • ZF TE-ML 14C • GM Strasbourg & Opel • Vickers I-286S, M-2950S

Use where ATF is recommended in mobile or stationary hydraulic and power steering units. Not recommended for CVT type transmissions.

SYNTHETIC UNIVERSAL AUTOMATIC TRANSMISSION FLUID

Stock#	Pkg./Size	Wt. Lbs.	Cost
ATF-QTC	(1) 946-ml Bottle	2.1	11.75
ATF-01C	(12) 946-ml Bottles	25.0	139.80
ATF-TP	(1) 9.45-litre Bottle	19.0	110.50
ATF-05	(2) 9.45-litre Bottles	38.0	219.00

**Use in
Ford, Chrysler
and G.M.
Transmissions**



How to Order

TOLL-FREE TELEPHONE ORDERING

Dial 1-800-956-5695, 7 am to 5 pm, Central Time, Monday through Friday, except for U.S. statutory holidays. When calling, please provide your Referral Number (from the back cover of the catalog).

TECHNICAL QUESTIONS

Direct all technical questions to the AMSOIL Technical Services Department, AMSOIL INC., AMSOIL Bldg., Superior, Wisconsin 54880 or call (715) 392-7101.

AMSOIL WARRANTY STATEMENT

The use of AMSOIL products will not cause mechanical damage to any mechanically sound equipment when AMSOIL products are used in full compliance with AMSOIL recommendations and instructions. For full warranty statement call 800-956-5695 and order the G-1363 (\$0.30).

ESTIMATED SHIPPING COSTS

AMSOIL charges actual freight on all Canadian Catalog orders. The following shipping schedule is provided for estimation purposes only. Actual freight costs will be established when each order is filled. Credit Cards will not be processed until freight is calculated and added to each order.

Location	Notes	1-3 Lbs.	4-5 Lbs.	6-15 Lbs.	16-26 Lbs.	27-49 Lbs.	50 lbs. or more
Ottawa, Toronto,							
Montreal		4.50	5.00	7.70	10.50	16.00	0.29 / lb
ON, PQ	1	5.00	6.00	9.00	13.00	19.00	0.41 / lb
NF, NS, PE, NB		16.00	17.00	19.75	22.00	38.00	0.53 / lb
AB	3	6.00	6.00	7.25	8.75	0.32 / lb	0.43 / lb
BC, SK	3	8.60	8.60	10.50	12.00	0.43 / lb	0.29 / lb
MB	3	12.00	12.00	13.50	15.00	0.55 / lb	0.36 / lb

Notes: 1. ON (Non-Ottawa-Toronto), PQ (Non-Montreal). 2. In the Northwest Territories and Yukon, actual rates vary to outlying areas. 3. In some cases there are "beyond point" charges.

PRODUCT DAMAGED DURING SHIPPING

If there is visible damage to your order upon delivery, refuse the order. It will be returned to AMSOIL INC. for inspection and a new order will be sent out at no extra charge to you. If you discover hidden damage after accepting delivery of your order, call 1-800-956-5695 for damaged product instructions.

SALES TAX INFORMATION

AMSOIL INC. has an established Sales Tax Rate for each Province.

NOTES: A General Sales Tax (GST) of 7% will be charged on all Canadian purchases. Only provincial governments are exempt. GST will be charged on the purchase price and the freight costs. In the provinces of Quebec, Prince Edward Island and New Brunswick the provincial sales tax will be charged on the GST. Freight charges are subject to sales tax on all orders.

RETURN POLICY

All unopened containers may be returned, freight pre-paid, to AMSOIL INC. for a full refund of the purchase price and sales tax within 30 days (shipping and handling fees are non-refundable). Call 1-800-956-5695 for instructions prior to returning any product.

OIL FILTER, AIR FILTER OR FLUID CAPACITY QUESTIONS

For oil and air filter specifications, consult your owner's manual or order the AMSOIL Oil & Air Filters Application Guide (G-194, 2.4 lbs, \$9.00). Assistance also available when placing order. For fluid capacity levels, consult your owner's manual or order the AMSOIL Product Selection Guide (G-50, .6 lb, \$17.75). Or call the AMSOIL Technical Service Department at 715-392-7101, 7 a.m. to 5 p.m. Central Time, M - F.

QUESTIONS

For questions on shipping, sales tax, damaged products, instructions, etc., call (715) 392-7101, 8 a.m. to 5 p.m. Central Time, M - F, except for U.S. statutory holidays.

-- Prices subject to change without notice --

**Start buying
wholesale today**

Preferred Customer Program

Ten dollars (U.S.) gets you a six-month trial Preferred Customer membership for buying AMSOIL products at wholesale prices. Here's what Preferred Customers get:

- Preferred Customers buy AMSOIL products at wholesale prices. If you buy \$100 of AMSOIL products a year, a Preferred Customer membership will save you money!
- Preferred Customers can register over the telephone (1-800-777-7094). Have referral number from back page ready when calling (if one is listed).
- Preferred Customers may change their membership to become an AMSOIL Dealer at any time.
- Preferred Customers receive a kit with information on more AMSOIL products and package sizes, and the monthly AMSOIL product, racing and application magazine, the *AMSOIL Action News*.



Want More? Become an AMSOIL Dealer

AMSOIL products are sold through independent Dealers.

People like you. People who want extra money, something to do in their spare time, even a full-time business.

You can start an independent AMSOIL Dealership for under \$50 . . . and put as much — or as little — time into it as you want.

There's always plenty of support . . . never any hassles. No quotas to fill. No inventory requirements. You're your own boss. It's the ideal business opportunity.

You can sell to commercial and retail accounts as well as individuals. It's up to you . . . extra money, a full-time income or rock-bottom prices on AMSOIL products.

Call 1-800-956-5695 and order a free G-1284 for information on the AMSOIL Preferred Customer Program and on becoming an independent AMSOIL Dealer.

Torque-Drive™ Synthetic Automatic Transmission Fluid

Engineered to eliminate the deficiencies common to all conventional petroleum ATFs, AMSOIL Torque-Drive™ provides superior performance and protection against thermal and oxidative degradation, sludge and varnish formation and viscosity shear down. Ideal for Allison Transmissions and heavy equipment

Recommended for use in applications specifying Allison® TES-295 or C-4, DEXRON® III, MERCON®, TE-ML 14C

TORQUE-DRIVE™ SYNTHETIC AUTOMATIC TRANSMISSION FLUID

Stock #	Pkg./Size	Wt. Lbs.	Cost
ATD-1G	(1) 3.78-litre Bottle	7.8	52.25
ATD-04	(4) 3.78-litre Bottles	31.2	184.60
ATD-TP	(1) 9.45-litre Bottle	19.1	125.00
ATD-05	(2) 9.45-litre Bottles	38.2	220.30



Synthetic Manual Transmission and Transaxle Gear Lube

Designed to meet the special requirements of certain manual transmissions and transaxles. Provides improved internal component protection. Formulated with extreme pressure additives and advanced synchromesh qualities that provide smooth shifts while protecting gears, bearings and seals. Non-corrosive to yellow metals. Recommended for use in synchronized manual transmissions and transaxles that require a 75W-85, 75W-90 or 80W-90 API GL-4 gear lube. Can also be used in NV 4500 transmissions and replaces GM part # 12346190 and Chrysler part # 4874459 (Chrysler specification MS-9070). Meets GL-4 specifications required by some models of Acura, Hyundai, Infiniti, Kia, Land Rover, Lexus, Mazda, Mitsubishi-Fuso and Zetor. Ideal for muscle car transmissions including Muncie, Borg-Warner, Saginaw, Ford Toploader, Dearborn and New Process.



SYNTHETIC MANUAL TRANSMISSION & TRANSAXLE GEAR LUBE 75W-90 • API GL-4

Stock #	Pkg./Size	Wt. Lbs.	Cost
MTG-QT	(1) 946-ml Bottle	2.0	11.05
MTG-01	(12) 946-ml Bottles	24.6	131.40
MTG-05	18.9-litre Pail	38.9	205.70
MTG-55	208-litre Drum	433.3	1810.00



Synthetic Synchronesh Transmission Fluid

Specifically designed for manual transmissions and transaxles with synchronesh systems that require light viscosity, non-extreme pressure fortified oil. Formulated with advanced additive technology to provide proper friction characteristics for smooth shifting without grinding or bump shifting while providing the ultimate in gear and bearing protection. Outperforms motor oils in manual transmissions and provides excellent performance in extreme temperatures from -40° F to 300° F. Possesses outstanding anti-wear and anti-foam properties and is non-corrosive to yellow metals. Recommended for use in manual transmissions and transaxles such as:

- New Venture NV T350, NV 1500, NV 3500, NV 3550, NV 5600
- Tremec T-4, T-5, T-18, T-176, T-500 and T-600
- Honda Genuine MTF. MTF is a SAE 5W-30, however, it is not for use in engines or wet clutches. Replaces GM part # 12345349, 12345577, 12377916 and 1052931 as well as Chrysler part # 4874464 and 4874465. Meets GM specifications 9985648, 9986105 and 9985535 and Chrysler MS-9224 and MS-9417.

SYNTHETIC SYNCHROMESH TRANSMISSION FLUID 5W-30

Stock #	Pkg./Size	Wt. Lbs.	Cost
MTF-QT	(1) 946-ml Bottle	2.1	9.70
MTF-01	(12) 946-ml Bottles	24.7	115.20
MTF-05	18.9-litre Pail	39.2	178.80
MTF-55	208-litre Drum	435.9	1544.00

Synthetic Tractor/Hydraulic Transmission Oil

Formulated for combinations of transmissions, hydraulic systems, final drives, power take-off systems and wet brakes. Exceeds the most demanding "all weather" specifications of both Ford New Holland FNHA-2-C-2 & 2-C-201 and John Deere J20C & J20D, as well as most other tractor hydraulic/transmissions, eliminating the need for seasonal oil changes.

SYNTHETIC TRACTOR/HYDRAULIC TRANSMISSION OIL SAE 5W-30

Stock#	Pkg./Size	Wt. Lbs.	Cost
ATH-QT	(1) 946-ml Bottle	2.1	7.95
ATH-01	(12) 946-ml Bottles	25.2	94.20



Series 2000 Synthetic Chain Case Lubricant

AMSOIL Series 2000 Chain Case Lubricant provides superior protection and performance for enclosed chains. Ideal for snowmobiles, ATVs and general equipment. Extreme Pressure additives provide extra wear protection. Extends chain life, repels water, and inhibits rust, oxidation and foam. Superior low-temperature starting, performance and protection.

Stock#	Pkg./Size	Wt. Lbs.	Cost
TCC-BEC	(1) 354-ml Bottle	1.0	8.00
TCC-06C	(6) 354-ml Bottles	6.0	47.40



Semi-Synthetic Bar and Chain Oil

Clings to metal surfaces better than other oils. Delivers unparalleled lubrication and protection.

Stock#	Pkg./Size	Wt. Lbs.	Cost
ABC-0T	(1) 946-ml Bottle	2.2	5.00
ABC-01	(12) 946-ml Bottles	26.0	58.80



Propylene Glycol Antifreeze and Engine Coolant

Combines the benefits of biodegradability, low toxicity and all-climate protection. AMSOIL Propylene Glycol Antifreeze and Engine Coolant is safer for kids and pets than ethylene glycol coolants. Offer protection for 1,207,000 km/7 years for over-the-road diesel trucks and 402,000 km/7 years for gasoline vehicles.

NEW!

Stock#	Pkg./Size	Wt. Lbs.	Cost
ANT-1G	(1) 3.78-litre Bottle	9.8	36.00
ANT-04	(4) 3.78-litre Bottles	39.0	142.40



To test freeze protection and additive concentration, order antifreeze test strips:

Stock#	Pkg./Size	Cost
G-1164	50 Strips	11.95
G-1165	6 Strips	3.50



Series 2000 Synthetic Racing Grease

Ultimate protection for hard-driven, high-performance vehicles. Dramatically reduces friction and wear for improved performance.

SERIES 2000 SYNTHETIC RACING GREASE N.L.G.I. NO. 2, GC/LB

Stock#	Pkg./Size	Wt.Lbs.	Cost
GRG-CR	(1) 397-g. Cartridge	1.1	14.90
GRG-10	(10) 397-g. Cartridges	11.0	148.00

X-Treme Synthetic Food Grade Grease

An ultra-premium lubricant designed for high levels of protection in food and pharmaceutical industry equipment. USDA H-1 rated for incidental contact with food.

X-TREME SYNTHETIC FOOD GRADE GREASE N.L.G.I. NO. 2 HIGH TEMPERATURE EP

Stock#	Pkg./Size	Wt.Lbs.	Cost
GXC-CR	(1) 397-g. Cartridge	1.1	11.05
GXC-10	(10) 397-g. Cartridges	11.0	109.50

Synthetic Multi-Purpose Spray Grease

The same great AMSOIL Synthetic Multi-Purpose Grease in a convenient spray formulation. Ideal for greasing hard-to-reach equipment such as hinges, springs and many other common applications.

SYNTHETIC MULTI-PURPOSE SPRAY GREASE

Stock#	Pkg./Size	Wt.Lbs.	Cost
CLC-SC	(1) 270-g. Spray Can	.8	8.90
CLC-16	(12) 270-g. Spray Cans	9.0	105.60

"Before using AMSOIL, two of our race cars were suffering wheel bearing seizure on a regular basis. This year, using AMSOIL Wheel Bearing Grease, our problems stopped totally."

H.C., HOUSTON, TX

Synthetic Heavy-Duty Grease

Extreme-pressure, moly-fortified. Provides outstanding protection for four wheel drive steering knuckles, spring shackles and other components operating in high-load conditions.

SYNTHETIC HEAVY-DUTY GREASE N.L.G.I. No. 2, GC/LB

Stock#	Pkg./Size	Wt.Lbs.	Cost
GHD-CR	(1) 397-g. Cartridge	1.1	6.85
GHD-10	(10) 397-g. Cartridges	11.0	67.50

Synthetic Multi-Purpose Grease

Reduces friction and wear in high-speed/high-temperature components such as automotive wheel bearings and electric motors. It keeps components running clean and trouble-free for outstanding performance and long life.

SYNTHETIC MULTI-PURPOSE GREASE N.L.G.I. NO. 2, GC/LB


Stock#	Pkg./Size	Wt.Lbs.	Cost
GLC-CR	(1) 397-g. Cartridge	1.1	6.20
GLC-10	(10) 397-g. Cartridges	11.0	61.00

Synthetic Water Resistant Grease

Resists water washout and degradation. Unparalleled protection for boat trailer wheel bearings and other components frequently exposed to water.

SYNTHETIC WATER RESISTANT GREASE N.L.G.I. NO. 2

Stock#	Pkg./Size	Wt.Lbs.	Cost
GWR-CR	(1) 397-g. Cartridge	1.1	7.20
GWR-10	(10) 397-g. Cartridges	11.0	71.00

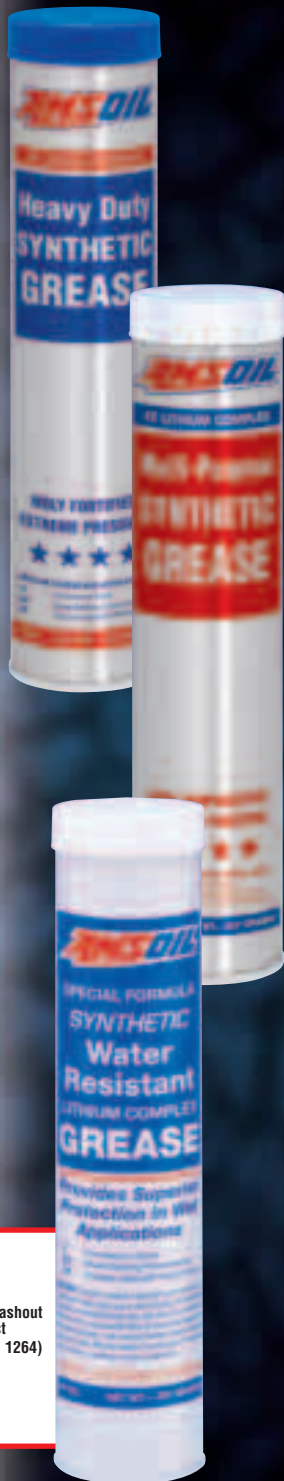

Grease That Won't Wash Away.





AMSOIL Octane Boost provides 4 to 5 point octane increase with 88 octane fuel!

Series 2000 Octane Boost

AMSOIL Series 2000 Octane Boost improves the performance of all two-cycle and four-cycle gasoline fueled engines. AMSOIL Octane Boost maximizes power, reduces engine knock and improves ignition and engine response. Helps fuel burn cleaner and removes carbon deposits. Excellent as a lead substitute at same treat rates in collector automobiles, older off-road equipment, 4x4 off-road vehicles and gasoline racing vehicles. One bottle treats 55 litres.

Stock#	Pkg./Size	Wt.Lbs.	Cost
COB-BE	(1) 354-ml Bottle	1.0	12.30
COB-O6	(6) 354-ml Bottles	5.0	73.20

P.I. Performance Improver Gasoline Additive

Ideal for both fuel-injected and carbureted systems. Dissolves and removes fuel system deposits and other contaminants for improved power and overall performance in gasoline engines. Reduces PCV and EGR system deposits. Reduces exhaust emissions (tests show up to 90 percent reduction). Improves engine idle, response and starting.

An initial clean-up dose of 177 ml for 35 to 55 litres of gasoline restores up to 95 percent of an injector's original fuel flow. Periodic maintenance doses of 30 ml for 35 to 55 litres of gasoline keep injectors and other fuel system components clean. One bottle treats up to 600 litres of gasoline!

Stock#	Pkg./Size	Wt.Lbs.	Cost
CPI-BF	(1) 473-ml Bottle	1.1	12.00
CPI-16	(12) 473-ml Bottles	13.0	142.80

P.I. Quick Shot

P.I. Quick Shot is packaged as a convenient, single-use application of P.I. Performance Improver. Empty entire contents into the fuel tank. Each 177-ml bottle treats 35 to 55 litres of gasoline.

Stock#	Pkg./Size	Wt.Lbs.	Cost
AQS-BB	(1) 177-ml Bottle	.7	6.30
AQS-O6	(6) 177-ml Bottles	4.0	37.20



Cleans Fuel Injectors



Gasoline Stabilizer

AMSOIL Gasoline Stabilizer keeps fuel from deteriorating during storage. AMSOIL Gasoline Stabilizer reduces the oxidation process and prevents varnish and gum buildup in gasoline. These contaminants can clog injectors, stick floats and cause poor engine performance. Treat rate is 30 ml with every 9.5 litres of fuel. Treats 150 litres total.

Stock#	Pkg./Size	Wt.Lbs.	Cost
AST-BF	(1) 473-ml Bottle	1.2	10.00
AST-16	(6) 473-ml Bottles	7.0	59.40

Diesel Fuel Additive Concentrate

All-season performance. Lowers diesel fuel gel point by 20° to 35°F, depending on mix ratio and fuel quality. Improves the performance, fuel efficiency and longevity of diesel engines while reducing deposits, black smoke, emissions and injector wear. For use in heavy-duty diesel engines. Treats up to 380 litres.

Stock#	Pkg./Size	Wt.Lbs.	Cost
ADC-CN	(1) 473-ml Can	1.4	8.85
ADC-16	(12) 473-ml Cans	17.0	105.00

Cetane Boost Diesel Fuel Additive

Improves combustion efficiency to increase power in diesel engines. Raises Cetane three to seven numbers. Also improves low-temperature starting, fuel ignition quality and reliability. Treats up to 760 litres.

Stock#	Pkg./Size	Wt.Lbs.	Cost
CCB-CN	(1) 473-ml Can	1.3	9.35
CCB-16	(12) 473-ml Cans	15.0	111.00

Diesel Fuel Modifier

Improves combustion, fuel efficiency, cold-weather starting, power and performance. Cleans injectors, fuel screens, pumps and filters. For use in diesel-fueled cars and light-duty trucks. Treats up to 150 litres.

Stock#	Pkg./Size	Wt.Lbs.	Cost
CDM-BF	(1) 473-ml Bottle	1.2	7.20
CDM-16	(6) 473-ml Bottles	7.0	42.60



Oil Analysis

AMSOIL and its subsidiary OAI Inc. provide state-of-the-art oil analysis service to its customers. Customers receive detailed analysis reports via mail and e-mail. Expert consultation of oil condition is easily accessible by phone.

Stock#	Pkg./Size	Wt. Lbs.	Cost
G-1318	(1) sample kit	0.1	32.00
G-1206	Oil Suction Pump w/10-ft. hose	--	39.85
G-1571	Replacement Hose 25-ft.	--	14.25



Super Duty Oil Filter

SDF Filters are composed of a special Cellulose, Synthetic and Glass Blend Media to provide longer life and improved efficiency. Performance tests demonstrated that AMSOIL SDF Filters provide over 75 percent better combined efficiency/capacity than other popular filters.

AMSOIL SDF Filters contain a combination of cellulose, synthetic and glass blend media to provide longer life and improved efficiency. An oil pressure relief valve assures proper oil flow at all times under all operating conditions. Each heavy-duty case has a drawn steel double-crimp at the base with rolled-under seaming. A proprietary elastometer anti-drain back valve keeps dirty oil in the filter when engine is not running.

SUPER DUTY FULL-FLOW ENGINE OIL FILTERS

Stock#	Wt. Lbs.	Cost	Group	Filters
			Group 1	SDF-23, 29, 30, 34, 57
Group 1	1.0	15.25	Group 2	SDF-11, 15, 22, 24, 25, 32, 96
Group 2	1.0	16.45	Group 3	SDF-10, 20, 36, 42, 44, 45, 52, 64, 84
Group 3	1.0	18.10	Group 4	SDF-13, 59, 76
Group 4	1.0	21.25	Group 5	SDF-26, 41, 80, 99
Group 5	2.0	28.60		

Order two filters to last the entire year, and save freight costs too! Change every 6 months or 20,000 km, whichever comes first.

Fill in your vehicle information. Then call 1-800-956-5695 or visit www.amsoil.com to determine your AMSOIL Oil and Air Filters.

Make _____ Year _____ Model _____

Engine _____

Your AMSOIL Oil Filter is **SDF-**_____ Your AMSOIL Air Filter is **TS-**_____

AMSOIL can also cross reference filters for your vehicle from the manufacturer and part number of the filters you are currently using. Call 1-800-956-5695 with this information or order an AMSOIL Oil and Air Filters Application and Cross Reference Guide (G-194, \$9.00) or Motorcycle and ATV Filter Application Guide (G-1768, \$1.80).

Super Duty Motorcycle Oil Filters

Comprised of a high-performance cellulose and synthetic blend media for longer life, more capacity and improved filtration efficiency in today's high-stress motorcycle engines.



Group	Part Number	Stock #	Wt. Lbs.	Cost
Group 1	SMF-104, 105	Group 1	.3	9.00
Group 2	SMF-107	Group 2	.3 - .5	10.25
Group 3	SMF-101, 110, 111, 131	Group 3	.2 - .4	10.35
Group 4	SMF-102, 109, 112, 113, 120, 121, 123, 124, 127	Group 4	.2 - .8	12.90
Group 5	SMF-103, 132, 133, 134, 135, 136	Group 5	.7 - 1.0	14.30
Group 6	SMF-103C, 122, 132C, 133C, 134C, 135C	Group 6	.6 - 1.0	18.55

• C = chrome filter

AMSOIL can find your vehicle's filter number or cross reference filters for your vehicle from the manufacturer part number of the filters you are currently using. Call 1-800-956-5695 with this information when ordering, or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed). For convenience, complete the form on the previous page.

Reusable Foam Air Filters

Oil-wetted foam improves performance and fuel efficiency by trapping more dirt and allowing better air flow. Wash with soap and water to reuse for years of trouble-free miles. Reapply High Tack Foam Filter Oil after every washing.

AUTOMOTIVE AIR FILTERS (TS)

Use Price Group 1 for: TS-11, 12, 13, 14, 16, 17, 18, 23, 27, 35, 40, 41, 50, 55, 57, 59, 67, 71, 76, 77, 90

Use Price Group 2 for: TS-05, 15, 20, 22, 32, 61, 63, 68, 69, 72, 78, 80, 95, 117, 170

Use Price Group 3 for: TS-09, 19, 31, 43, 45, 47, 52, 53, 54, 58, 79, 81, 85, 87, 89, 91, 96, 97, 119, 120, 122, 125, 126, 127

Use Price Group 4 for: TS-04, 06, 07, 08, 21, 24, 25, 33, 38, 49, 74, 88, 98, 101, 105, 110, 113, 115, 118, 124, 128, 152, 154, 155

Use Price Group 5 for: TS-29, 51, 86, 93, 94, 102, 108, 109, 116, 121, 191

Use Price Group 6 for: TS-83, 92, 103, 104, 106, 114, 123, 129, 142, 160, 162, 176, 189

Use Price Group 7 for: TS-139

**More Air Flow Traps More
Dirt Improves Performance**



POWER SPORTS AIR FILTERS

(For Dirt Bikes and ATVs)

Use Price Group 1 for:

PSFA-68

Use Price Group 2 for:

PSFA-23

Use Price Group 3 for:

PSFA-46, 47

Use Price Group 4 for: PSFA-45

Use Price Group 5 for: PSFA-40, 66

Use Price Group 6 for: PSFA-33, 35, 44, 61

Use Price Group 7 for: PSFA-19, 21, 28, 42, 58

Use Price Group 8 for: PSFA-22, 55, 72

Use Price Group 9 for: PSFA-15, 18, 20, 31, 32, 37, 38, 49, 52, 54, 56, 62, 63

Use Price Group 10 for: PSFA-30, 34, 57

Use Price Group 11 for: PSFA-26, 39, 41, 48, 59, 65, 71

Use Price Group 12 for: PSFA-50, 51

Use Price Group 13 for: PSFA-10, 11, 12, 14, 16, 17, 25, 27, 29, 43, 53, 64, 67, 69, 70

Use Price Group 14 for: PSFA-13, 24, 36

Use Price Group 15 for: PSFA-60



REUSABLE AUTOMOTIVE AIR FILTERS (TS)

Stock #	Pkg./Size	Wt.Lbs.	Cost
Group 1	(1) Air Filter	2.0	33.00
Group 2	(1) Air Filter	2.0	39.25
Group 3	(1) Air Filter	2.0	45.25
Group 4	(1) Air Filter	2.0	52.50
Group 5	(1) Air Filter	2.0	64.75
Group 6	(1) Air Filter	2.0	77.50
Group 7	(1) Air Filter	2.0	114.00

POD REUSABLE AIR FILTERS

Stock#	Pkg./Size	Wt.Lbs.	Cost
POD	(1) Air Filter	2.0	25.00

Fits small engines such as garden tractors, lawn mowers, etc.

REUSABLE POWER SPORTS AIR FILTERS (PSFA)

Stock #	Pkg./Size	Wt.Lbs.	Cost
Group 1	(1) Air Filter	0.3	8.55
Group 2	(1) Air Filter	0.3	14.20
Group 3	(1) Air Filter	0.3	21.30
Group 4	(1) Air Filter	0.3	24.15
Group 5	(1) Air Filter	0.3	27.00
Group 6	(1) Air Filter	0.3	28.40
Group 7	(1) Air Filter	0.3	29.80
Group 8	(1) Air Filter	0.3	31.25
Group 9	(1) Air Filter	0.3	32.65
Group 10	(1) Air Filter	0.3	34.05
Group 11	(1) Air Filter	0.3	35.50
Group 12	(1) Air Filter	0.3	37.75
Group 13	(1) Air Filter	0.3	38.30
Group 14	(1) Air Filter	0.3	41.15
Group 15	(1) Air Filter	0.3	49.65



High Tack Foam Filter Oil

Special "high tack" oil for long term effectiveness. Traps and holds dirt and dust particles. Spray has all the benefits of High Tack Foam Filter Oil in a convenient aerosol spray formulation.

Stock#	Pkg./Size	Wt.Lbs.	Cost
AFO-BC	(1) 237-ml Bottle	.7	5.05
AFO-08	(6) 237-ml Bottles	4.0	29.70
CFO-SC	(1) 325.3-ml Spray Can	1.0	8.45
CFO-06	(6) 325.3-ml Spray Cans	6.0	50.10

Foam Air Filter Cleaner

Specially formulated high quality biodegradable detergent offering quick, efficient and easy cleaning and preservation of AMSOIL Air Filters.

Stock#	Pkg./Size	Wt.Lbs.	Cost
FFC-BE	(1) 354-ml Bottle	1.9	7.20
FFC-06	(6) 354-ml Bottles	7.6	42.60

AMS-Oiler™ Pre-Charger

Puts an end to dry-engine starting. Motor oil is injected directly on bearings and other wear sensitive surfaces upon turning the ignition key. Performs reliably in any personal, commercial or industrial application.

The AMK-01 is designed for use with the AMSOIL BMK-13 or 15 through 18 Dual Remote systems.

The AMK-02 can be used with any engine application and mounts at any angle.

Stock#	Pkg./Size	Wt.Lbs.	Cost
AMK-01	(1) AMS-Oiler (By-Pass mounted)	13.0	558.00
AMK-02	(1) AMS-Oiler (stand alone)	13.0	661.00

Ford 6.0L Diesel Fuel Filter

The FFK-60 Fuel Filter is designed for the Ford 6.0L Diesel PowerStroke™ engine. Incorporates both a primary and secondary filter for maximum fuel cleanliness.

FFK-60 FUEL FILTER

Ford 6.0L Diesel PowerStroke™ Applications

Stock#	Pkg./Size	Wt.Lbs.	Cost
FFK-60	(1) Fuel Filter	2.0	85.75

Ford 6.0L Diesel Oil Filter

The SDF-88 Oil Filter is designed for the Ford 6.0L Diesel PowerStroke™ engine. Constructed of a highly efficient synthetic blend media. Provides increased engine life and improved filtration efficiency.

SDF-88 OIL FILTER

Ford 6.0L Diesel PowerStroke™ Applications

Stock#	Pkg./Size	Wt.Lbs.	Cost
SDF-88	(1) Oil Filter	0.5	44.25



AMSOIL PowerCore® Air Filters

The rugged structure of PowerCore® filters features an innovative, layered, fluted filter media which allows air to enter an open flute while forcing it out an adjacent flute, allowing only clean air into the engine. Dirty air is effectively filtered and cleaned in only one pass through the media. Ten times more efficient than standard filter designs.

PowerCore® is a registered trademark of Donaldson Company Inc. These filters are manufactured by Donaldson for AMSOIL.

Ford 6.0L Diesel PowerStroke™ Air Filter

Stock#	Pkg./Size	Wt.Lbs.	Cost
PCF-60	(1) PowerCore® Air Filter	4.8	99.75

Hummer H2 6.0L Vortec™ Air Filter

Stock#	Pkg./Size	Wt.Lbs.	Cost
PCF-H2	(1) PowerCore® Air Filter	2.7	99.75



Donaldson Endurance™ Heavy-Duty Filters

AMSOIL offers premium Donaldson oil, air and fuel filters for heavy duty diesel applications. Donaldson Endurance™ Air Filters with exclusive nanofiber technology offer longer engine and filter life, initial efficiency up to 99.99 percent and five times more capacity. Donaldson Endurance™ Oil Filters with premium advanced synthetic media technology deliver higher dirt holding capacity and higher efficiency compared to conventional cellulose filters for extended service intervals and superior engine protection.

Contact your AMSOIL Servicing Dealer for more information.



By-Pass Oil Filter

Engine wear is caused by dirt particles larger than 5 microns. The AMSOIL By-Pass Oil Filter removes particles less than 1 micron, virtually eliminating engine wear.

(Some mechanical ability required for installation.)

AMSOIL By-Pass Oil Filters filter all the oil in a 5.7-litre system in about five minutes at an average engine speed equivalent to 72 kph.

(Yellow mounting stand for demonstration purposes only; not included.)



*SPIN-ON BY-PASS OIL FILTRATION KIT

Stock#	Pkg./Size	Wt. Lbs	Cost
BMK-11	(1) Universal Mounting Kit	3.4	229.00
BMK-13	(1) Reversible Remote Mount	9.0	290.00

*The BMK-11 kit includes a filter mount, 8' hose and mounting hardware. By-pass filter elements sold separately below.

*The BMK-13 kit includes a double filter mount, 8' hose, engine adapters and mounting hardware. Filter elements sold separately.

BY-PASS OIL FILTER REPLACEMENT ELEMENT

Stock#	Pkg./Size	Wt. Lbs	Cost
BE-90	(1) Length 5 $\frac{3}{4}$ " (14.6 cm)	3.0	39.00
BE-100	(1) Length 7 $\frac{3}{8}$ " (18.75 cm)	3.0	44.00
BE-110	(1) Length 10 $\frac{3}{8}$ " (26.35 cm)	4.0	48.00

*OIL SENDING UNIT ADAPTERS

Stock#	Pkg./Size	Wt. Lbs	Cost
BP-44	(1) Adapter Kit (fits most Japanese cars)	.2	15.95
BP-45	(1) Adapter Kit (fits most European cars)	.2	15.95

*Call the AMSOIL Technical Services Department at (715) 392-7101 with questions or for installation assistance.



Dual Remote Oil Filtration Kit

(Without filter elements—2 required).

Versatile system combines full-flow and by-pass oil filtration on a single, easy-to-install mount. All installation parts are included.



Marine Dual Remote Oil Filtration Kit

High efficiency oil filtration system for marine applications combines full-flow and by-pass oil filters on an easily accessible remote mount. Adapter kits allow system to be used with a wide variety of marine engines.

MARINE DUAL REMOTE OIL FILTRATION KIT

Stock#	Pkg./Size	Wt. Lbs.	Cost
BMK-18	(1) Marine Mounting Kit	13.0	760.00
BK-195	(1) $\frac{3}{4}$ - 16" thread adapter	--	75.50
BK-196	(1) $1\frac{1}{16}$ - 16" thread adapter	--	75.50
BK-197	(1) 18 mm - 1.5" thread adapter	--	75.50
BK-198	(1) 20 mm - 1.5" thread adapter	--	75.50

* The BMK-18 kit includes a dual filter mount, mounting hardware, hoses, hose fittings and component parts. Filter elements and adapter kits sold separately.

Call the AMSOIL Technical Services Department at (715) 392-7101 or order a G-2051 Marine Dual Remote Cross Reference Guide (\$0.45) to determine the appropriate adapter kit for your application.

Engine Flush

Cleans the crankcase, cylinder walls, pistons and rings for maximum efficiency, protection and performance. Preps engines for installation of AMSOIL Synthetic Motor Oil. Flushing requires one bottle per vehicle (3.8- to 5.7-litre oil capacity).

Use Engine Flush before changing your oil.

Stock#	Pkg./Size	Wt. Lbs.	Cost
CEF-CN	(1) 473-ml Bottle	1.1	6.95
CEF-16	(12) 473-ml Bottles	13.0	82.20

Power Foam

Improves starting and performance. Cleans dirty intake systems and spark plugs and frees sticky valves. Also removes gum, varnish and carbon deposits from engine exterior surfaces.

Stock#	Pkg./Size	Wt. Lbs.	Cost
CPF-SC	(1) 462-g. Spray Can	1.5	6.75
CPF-12	(12) 462-g. Spray Cans	18.0	79.80



Silicone Spray

Perfect for lubricating nonmetallic surfaces that come into contact with metal, nylon, cardboard, fiberglass, wood or plastic surfaces. Works great as a suede protectant. Use anywhere a light-duty or silicone lubricant is required. Special nonstain formula. USDA H-1 rated.



Stock#	Pkg./Size	Wt.Lbs.	Cost
CLS-SC	(1) 284-g. Spray Can	1.2	9.30
CLS-06	(6) 284-g. Spray Cans	7.0	55.20



Heavy Duty Metal Protector

A heavy-duty spray lubricant fortified with special rust and corrosion inhibitors. It penetrates and adheres to metal surfaces, leaving a dry, long lasting wax-like protective coating. Ideal for motorcycle, bicycle and ATV chains. Also works well as an undercoat, preventing rust and eliminating squeaks.

Stock#	Pkg./Size	Wt.Lbs.	Cost
CMH-SC	(1) 473-ml Spray Can	1.5	8.65
CMH-12	(12) 473-ml Spray Cans	18.0	102.60



Metal Protector

Disperses water and protects metal surfaces from rust and corrosion. Dries completely and doesn't attract dust. Penetrates existing rust build-up and loosens bolts. Also dries wet electrical systems. A must for any home or shop. Keep a can in your vehicle too.

Stock#	Pkg./Size	Wt.Lbs.	Cost
CMP-SC	(1) 208-g. Spray Can	.8	6.25
CMP-12	(12) 208-g. Spray Cans	10.0	73.80



Synthetic Compressor Oil

Provides unsurpassed protection and performance in rotary screw, rotary vane, reciprocating and other compressor applications. Compatible with PAO-, ester- and petroleum-based compressor oils. Not compatible with glycol- or silicone-based compressor oils. Call AMSOIL Technical Services at (715) 392-7101 with questions.

SYNTHETIC COMPRESSOR OIL (ISO 46, SAE 20)

Stock#	Pkg./Size	Wt.Lbs.	Cost
PCI-QT	(1) 946-ml Bottle	2	9.40
PCI-01	(12) 946-ml Bottles	24	111.60
PCI-05	(1) 18.9 litre Pail	39	174.00

SYNTHETIC COMPRESSOR OIL (ISO 100, SAE 40)

Stock#	Pkg./Size	Wt.Lbs.	Cost
PCK-QT	(1) 946-ml Bottle	2	9.85
PCK-01	(12) 946-ml Bottles	25	117.00
PCK-05	(1) 18.9-litre Pail	39	185.75



BriteSide™ T6 Cleaning Concentrate

Super concentrated cleaning product tackles the toughest cleaning jobs, yet when diluted with water, is safe and effective on virtually every surface or material. Full strength, T6 removes spray paint, surface rust, grease, oil, glue and ink. Label directions for several dilutions create a multipurpose cleaner for every chore in the house or garage.

Stock#	Pkg./Size	Wt. Lbs.	Cost
BT6HG	(1) 1.893-litre Bottle	4.7	35.00
BT606	(6) 1.893-litre Bottles	29.7	209.40
G-1782	(1) 710-ml Spray Bottle	-	3.00
G-1783	(1) 60-ml Syringe	-	1.20

BriteSide™ Miracle Wash Aerosol Spray

A unique dry car wash and polish delivers outstanding performance and quick, easy and economical applications. No water required. Specially formulated surfactants lift dirt and other particles from the surface of your car and hold them in suspension. Miracle Wash then acts as a shield, protecting the surface from abrasion while you wipe the dirt clean. Repels dust and light dirt particles and protects against the sun's ultraviolet rays.

Stock#	Pkg./Size	Wt. Lbs.	Cost
CMW-SC	(1) 384-ml Spray Can	1	12.05
CMW-06	(6) 384-ml Spray Cans	6	71.70

BriteSide™ Heavy Duty SCRUB Hand Cleaner

Formulated for the toughest cleaning jobs, BriteSide™ Heavy Duty SCRUB Hand Cleaner dissolves and assimilates oils and greases on hands with little or no rubbing action. Available with or without pumice. May be used with or without water.

Stock#	Pkg./Size	Wt. Lbs.	Cost
BSH-BF	(1) 473-ml Bottle	1	10.55
BSH-16	(6) 473-ml Bottles	6	62.70
BSH-1G	(1) 3.78-litre Bottle	9	38.40
BSH-04	(4) 3.78 litre Bottles	36	152.00
BHP-TB	(1) 1.35 kg Tub (with Pumice)	3	19.90
BHP-06	(6) 1.35 kg Tubs (with Pumice)	18	118.80
G-1788	(25) 10-ml Sample Packets	-	23.50
G-1806	(1) 3.7-litre Bottle Pump	-	3.50
G-1818	(1) Wall Mount Bracket	-	19.95

BriteSide™ Vinyl & Leather Cleaner

Penetrates deeply into fabric pores to lift out imbedded dirt. Simply spray on, allow a minute or two to penetrate and loosen dirt particles, then wipe off with a damp cloth or sponge.

Stock #	Pkg./Size	Wt. Lbs.	Cost
PFC-BF	(1) 473-ml Bottle	1.3	10.80
PFC-16	(6) 473-ml Bottles	7.6	64.20

BriteSide™ Vinyl & Leather Protectant

Seals and protects vinyl, rubber, plastic and finished wood surfaces. Protects against fading, cracking, drying, deterioration and oxidation caused by exposure to the sun.

Stock #	Pkg./Size	Wt. Lbs.	Cost
PFP-BF	(1) 473-ml Bottle	1.3	13.60
PFP-16	(6) 473-ml Bottles	7.5	81.00

BriteSide™ Metal Polish

Cleans, polishes and protects chrome, aluminum, brass and stainless steel surfaces. Forms a protective layer and inhibits future rust and oxidation.

Stock #	Pkg./Size	Wt. Lbs.	Cost
PFM-BC	(1) 236-ml Bottle	.7	7.80
PFM-08	(6) 236-ml Bottles	4.1	46.20

BriteSide™ Car Polish

Goes on easy and produces a brilliant mirror-like shine with only light hand buffing. It forms a tough, protective barrier against the elements. Provides UV protection to keep paint from fading.

Stock #	Pkg./Size	Wt. Lbs.	Cost
PCP-BF	(1) 473-ml Bottle	1.3	13.25
PCP-16	(6) 473-ml Bottles	7.3	78.90

BriteSide™ Rain Clear Windshield Protectant

Maximize visibility in all kinds of weather. Rain, snow and sleet is repelled off glass. Wind action of driving forces moisture off the windshield, giving a clear view of the road ahead.

Stock #	Pkg./Size	Wt. Lbs.	Cost
ARS-BA	(1) 118-ml Bottle	.3	6.50
ARS-04	(4) 118-ml Bottles	1.2	25.60



Bosch Products

AMSOIL offers top-of-the-line Bosch windshield wipers, spark plugs and spark plug wires, meeting virtually every automotive application.



Bosch Micro Edge Excel Wipers

Bosch Micro Edge Excel Wipers offer unsurpassed performance and moisture removal in all types of climates and driving speeds. Features revolutionary dual rubber technology. Specially blended rubber wiping edge effectively reduces haze and streaks, improves wear resistance and lends to quieter operation and longer life, while the specially blended rubber compound improves flip-over flexibility, reduces windshield "chatter" and improves resistance to ozone, UV rays and road chemicals. Universal adapters included, fitting 99 percent of vehicle applications.

Stock#	Pkg./Size	Wt. Lbs.	Cost
B40916	(1) 16" blade	0.4	19.00
B40917	(1) 17" blade	0.5	19.00
B40918	(1) 18" blade	0.4	19.00
B40919	(1) 19" blade	0.5	19.00
B40920	(1) 20" blade	0.5	22.00
B40921	(1) 21" blade	0.5	23.20
B40922	(1) 22" blade	0.5	23.95
B40924	(1) 24" blade	0.6	33.35
B40928	(1) 28" blade	0.7	39.00

Bosch Platinum+4 Spark Plugs

Bosch Platinum+4 spark plugs are the most powerful spark plugs on the market. Feature unique four-ground electrode design and revolutionary firing technology, providing longer, more powerful sparks, longer service life and more efficient combustion than conventional single electrode spark plugs. Pure platinum heat-fused center electrode delivers smoother acceleration, improved fuel efficiency, maximum power and extended performance life.



Stock#	Pkg./Size	Wt.	Lbs.	Cost	Stock#	Pkg./Size	Wt.	Lbs.	Cost
B4417	(1) Spark Plug	0.2	11.60		B4458	(1) Spark Plug	0.2	11.60	
B4418	(1) Spark Plug	0.2	11.60		B4459	(1) Spark Plug	0.2	11.60	
B4419	(1) Spark Plug	0.2	11.60		B4469	(1) Spark Plug	0.2	11.60	
B4428	(1) Spark Plug	0.2	11.60		B4477	(1) Spark Plug	0.2	11.60	
B4448	(1) Spark Plug	0.2	11.60		B4478	(1) Spark Plug	0.2	11.60	
B4449	(1) Spark Plug	0.2	11.60		B4479	(1) Spark Plug	0.2	11.60	
B4457	(1) Spark Plug	0.2	11.60						

Bosch Spark Plug Wire Sets

In order to combat heat and extreme under-hood conditions, today's automotive engines require top quality spark plug wire sets. Bosch spark plug wire sets are top-of-the-line, often exceeding original equipment manufacturer (OEM) quality. Effectively deliver maximum voltage to the engine's spark plugs for hotter, more powerful and longer sparks, improving fuel economy, delivering quicker and easier starting, smoother idle and acceleration and reduced emissions.



Call 1-800-956-5695 for pricing and application information on Bosch Spark Plug Wire Sets.

Fill in your vehicle information. Then call 1-800-956-5695 or visit www.amsoil.com to determine your appropriate Bosch wipers, spark plugs and wires. You may also order the G-1766 Bosch Wiper Blade Catalog (\$2.00) and G-1767 Bosch Plug & Wire Set Catalog (\$10.70) to determine your appropriate wipers, plugs and wires.

Make _____ Year _____ Full Model _____

Cylinder _____ Engine _____ Engine VIN _____

Your Bosch wipers are _____

Your Bosch spark plugs are _____

Your Bosch wires are _____

Promotional Items

VARSITY JACKET

Reversible three season varsity jacket features two styles in one. One side boasts black wool body and blue leather sleeves with embroidered AMSOIL logos on the front and back. Other side features nylon body and sleeves with embroidered AMSOIL logo on the front. Two handy front pockets on both sides. Sizes S-XXXL.

Stock #	Size	Cost
G-2019	S	152.00
G-2020	M	152.00
G-2021	L	152.00
G-2022	XL	152.00
G-2023	XXL	152.00
G-2024	XXXL	152.00



Jacket Back



Back



A.J. AMATUZZIO SIGNATURE SERIES RACE JACKET

Features large embroidered AMSOIL logos, products and major racing sponsorships. 14.5 oz. brushed twill, satin lining, knit cuff and waistband, shoulder pads, racing collar and stainless steel snaps. Large, generous fit. Sizes Extra Small-XXXL, Youth Large.

Stock #	Size	Cost	Stock #	Size	Cost
G-1748	XS	220.00	G-1724	XL	220.00
G-1721	S	220.00	G-1725	XXL	220.00
G-1722	M	220.00	G-1726	XXXL	220.00
G-1723	L	220.00	G-1727	Youth L	193.00



Front

FULL SPEED T-SHIRT

Features AMSOIL logo on front, while back boasts AMSOIL logo with tachometer image. Durable 100 percent ultra cotton. S-XXXL.


Stock #	Size	Cost	Stock #	Size	Cost
G-1893	S	21.40	G-1896	XL	21.40
G-1894	M	21.40	G-1897	XXL	24.25
G-1895	L	21.40			

RED FLAME JERSEY

Long sleeve jersey features distinct flame design with large AMSOIL Racing logo on the front and AMSOIL logos on the sleeves and collar. Constructed of a soft breathable polyester material. Coordinates with the AMSOIL Red Flame Cap.

Sizes S-XXL.

Stock#	Size	Cost	Stock#	Size	Cost
G-2004	S	70.00	G-2007	XL	70.00
G-2005	M	70.00	G-2008	XXL	70.00
G-2006	L	70.00			

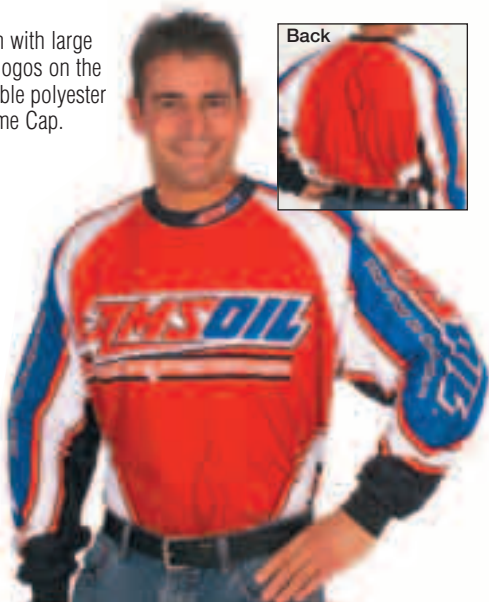

ALL OCCASION CAP

Stone-colored six-panel structured cotton twill cap features large embroidered AMSOIL logo, red and royal sandwich peak and velcro closure.

Stock#	Cost
G-1847	24.00



BLACK RACE CAP

Black six-panel cap features embroidered AMSOIL Racing logo, velcro closure and newly designed brim.

Stock #	Cost
G-1825	24.00



AMSOIL RACING DECALS

Stock#	Size	Cost
G-1789	(4" - pkg. of 10)	7.95
G-1800	(7" - pkg. of 10)	11.90
G-1790	(12" - pkg. of 5)	9.00
G-1791	(1 - 20")	4.65
G-1792	(1 - 36")	7.80
G-1793	(1 - 48")	19.50




MECHANIC GLOVES

Feature stretch knit spandex top, Clarino leather palm and fingers and adjustable velcro stretch elastic cuff. S-XXL.

Stock#	Size	Cost	Stock#	Size	Cost
G-1842	S	40.25	G-1845	XL	40.25
G-1843	M	40.25	G-1846	XXL	42.50
G-1844	L	40.25			

DECALS

Stock #	Size	Cost
G-1051	(3" - pkg. of 20)	3.60
G-1058	(6" - pkg. of 10)	3.60
G-1110	(13")	1.55 ea
G-1119	(20 1/2")	4.20 ea
G-1123	(36")	7.25 ea
G-1323	(48")	17.20 ea



The Company of Firsts

Over 30 Years of Innovation and Leadership



AMSOIL INC.
2206 WINTER STREET
SUPERIOR, WI 54880



- **First** to develop an API rated 100 percent synthetic motor oil.
- **First** to introduce the concept of “extended drain intervals” with a recommended 25,000-mile/12-month drain interval.
- **First** U.S. company to utilize the NOACK volatility test as a standard of performance excellence.
- **First** to produce synthetic motor oils for diesel engines, racing engines, turbos and marine engines.
- **First** to introduce synthetic oils that legitimately contribute to improving fuel efficiency.
- **First** to manufacture synthetic gear lube for automotive use.
- **First** to manufacture a 100:1 pre-mix synthetic 2-cycle oil.
- **First** to manufacture a synthetic automatic transmission fluid for automotive use.

*Refer to this referral number to save time
and make ordering easier. Call toll-free at
1-800-956-5695. Credit card orders only.* 

Referral # _____